



HANWHA Partners to success



High-Tech / High-Touch
La marque de confiance
Die Marke des Vertrauens
La marca di fiducia






JR TOOL ApS Tel: +45 75 82 90 66
Skomagervej 3c Fax: +45 75 83 99 77
DK-7100 VEJLE

Walter Dünner SA SWISS TOOLING
CH-2740 Moutier Switzerland
Tél: +41 32 493 11 52 Fax: +41 32 493 46 79

Outillage pour HANWHA Tooling for HANWHA

Werkzeuge für HANWHA Ustensili per HANWHA

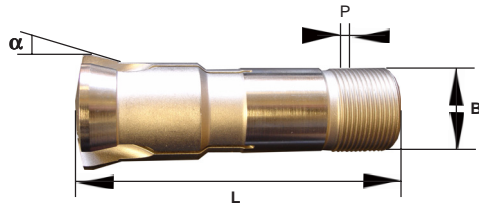

Machines Maschinen Machines Macchine	Canon type Führungsbüchse Typ Bush type Boccola tipo	P	BxL	α				Pince poupée Spindelstock Headstock collet Pinza per fantina	P. contre-poupée** P.-up Abgreifspindel** P.-up collet** P. contro-mandrino**	Pince porte-outil Werkzeughalterspannz. Tool holder collet Pinza porta-utensile	Burins Stähle Tools Utensili	
SL	12S/H	B212A	M16x1	18x60	30°	13.00	11.11	9.00	F15/580-120E	-	ER11-ER16	12x6
	16S/H	J7AR	M22x1	22x68	16°	18.00	16.50	12.50	F22/71-140E	-	ER11-ER16	12x6
	20S	B261	M25x1	28x82	16°	20.00	28.00	23.00	F26/64-145E	-	ER11-ER16	12x6
	26S/H	B227	M34x1	34x87.5	10°	26.00	22.00	18.00	F32/221-161E	-	ER11-ER16	12x5
	26HP II	B227	M34x1	34x87.5	10°	26.00	22.00	18.00	F32/221-161E	-	ER16	12x5
	32S/HE	J9	M40x1	42x82	16°	32.00	28.00	23.00	F37/740-1536E	-	ER16	16x5
	32HP II	J9	M40x1	42x82	16°	32.00	28.00	23.00	F37/740-1536E	-	ER16	16x5
	32HPD	J9	M40x1	42x82	16°	32.00	28.00	23.00	F37/740-1536E	-	ER20	16x6
	35HP II	!!! Disponible sous peu - Soon available - Bald verfügbar - Disponibile fra poco tempo !!!										
STL	32H	J9	M40x1	42x82	16°	32.00	28.00	23.00	F37/740-1536E	-	ER16-ER20	16x5
XD	20H	B261	M25x1	28x82	16°	20.00	28.00	23.00	F26/64-145E	-	ER16	12x6

(F)

*Canon utilisé exclusivement en canon tournant
**Exécution avec nez rallongé possible
L = A gauche
R = A droite

(D)

*Führungsbüchse nur mit umlaufender Lünette gebraucht
**Ausführung mit verlängerter Nase möglich
L = Links
R = Rechts

(GB) (E)

*Guide bush used with rotating bush only
**Execution with extended nose possible
L = Left hand
R = Right hand

(I)

*Boccola adoperata soltanto nella boccola rotante
**Esecuzione con lungo naso possibile
L = A sinistra
R = A destra